

TetraCon® Conductivity Cells

TetraCon® 700/700 IQ

- 4-electrode Design
- Extremely robust and durable
- Large measuring range with only a single cell
- Highly resistant to fouling



TetraCon® 700 IQ

Compared to the 2-electrode sensors, the TetraCon® 4-electrode measuring procedure offers considerable application targeted advantages, especially in the area of higher conductivities.

TetraCon® 700 conductivity sensors are especially suitable for use in wastewater treatment plants dealing with highly loaded sewage. Due to the special measuring technique employed, severe influences from polarization effects are eliminated, resulting in improved accuracy of the sensor. Provided the devices are installed in accordance with the manufacturer's instructions, errors due to the distortion of the current and voltage fields are also avoided.

The special cell geometry of the TetraCon® 700 makes it impervious to fouling, and the abrasion resistant carbon electrodes are also easy to clean. The modern epoxy resin encapsulation technique used diminishes the likelihood of sensor breakage in harsh industrial environments.

The TetraCon® 700 as digital model TetraCon® 700 IQ is also available for connection to IQ Sensor Net. This version is specially featured by a larger measuring range (10 μ S/cm ... 500 mS/cm).


Furthermore, TetraCon® 700 SW seawater model for fish-farming has proven quality for harsh weather conditions, in salt water and with wave action.

TetraCon® 4-electrode Design

The conductivity of a given electrolyte is determined by an electro-chemical resistance measurement. In its simplest configuration, the measuring cell uses two electrodes to which an alternating voltage is applied. The electric current which is directly proportional to the free ions in the electrolyte is measured. The electronic instrument then calculates the conductivity of the solution, taking into account the absolute cell constant of the sensor.

With the TetraCon® 4-electrode design, two separate electrode pairs are used whereby the currentless voltage electrodes produce a stable and constant reference potential. The voltage drop at the current electrodes is regulated via a potentiostat circuit.

The advantage of this technique is that it eliminates measurement errors usually caused by polarization effects which most likely build up at higher conductivity levels. Contact resistance problems caused by contaminated electrodes is also largely avoided by this design.

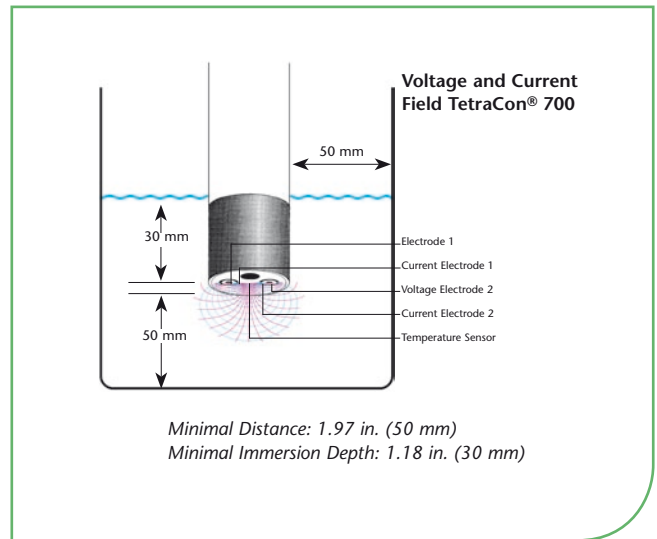

WTW Conductivity Sensors

TetraCon® 700

Rugged conductivity sensor (4-electrode design), with integrated dual thermistor, abrasion resistant carbon electrodes and break-proof epoxy body; measuring range 10 $\mu\text{S}/\text{cm}$ to 1000 mS/cm . Submersible sensor assembly specially designed for use in wastewater treatment plants.

TetraCon® 325


4-electrode conductivity cell with graphite electrodes, integral temperature probe; measuring range 1 $\mu\text{S}/\text{cm}$ - 2000 mS/cm . Suitable for universal applications.

TetraCon® DU/T

4-electrode conductivity cell with integral flow-thru chamber (7 ml volume), built-in temperature sensor; measuring range 1 $\mu\text{S}/\text{cm}$ to 2000 mS/cm . Recommended for standard industrial applications.

TetraCon® 700 IQ

Digital 4-electrode conductivity cell (same as TetraCon® 700). In addition to the general preferences of IQ technology the TetraCon® 700 IQ offers the benefit of a larger measuring range (10 $\mu\text{S}/\text{cm}$... 500 mS/cm).

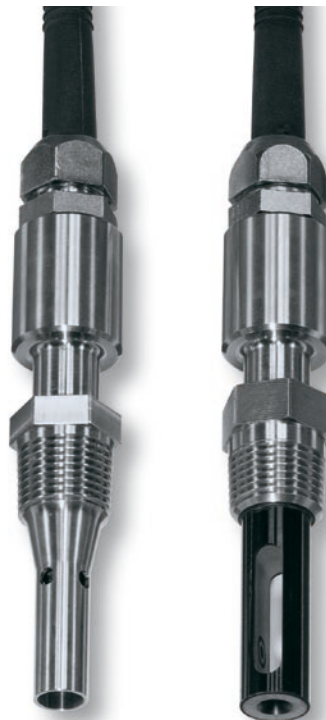

LRD 01

316 Ti stainless steel conductivity cell for installation in pipes. Built-in temperature sensor (266 °F/130 °C max.), measuring range 0.01 to 200 $\mu\text{S}/\text{cm}$, pressure resistant up to 14 bar, 1/2 inch NPT thread.

LRD 325

Conductivity measuring cell for installation in pipes. With built-in temperature sensor (up to 212 °F/100 °C). Measuring range 1 $\mu\text{S}/\text{cm}$ to 2 S/cm , pressure resistant up to 10 bar. 1/2 inch NPT thread.

LR 325/01

Low-level conductivity cell with flow-thru chamber, integrated temperature sensor; measuring range 0.001 to 300 $\mu\text{S}/\text{cm}$. For use in ultra-pure water applications; e.g., boiler feed water.

LR 325/001

Like Model LRD 325/01, but with higher resolution; measuring range 0.0001 to 30 $\mu\text{S}/\text{cm}$. Sensor is especially designed for trace measurement in both aqueous and non-aqueous or partially aqueous media.

Parameter section

Dissolved Oxygen

pH/ORP

Conductivity

Turbidity/Suspended Solids

Nitrogen

Phosphate

Carbon: COD/TOC/DOC/BOD/SAC

Technical Data Conductivity Cells

Model	Analog			Digital
	TetraCon® 700 (SW**)	LRD 01	LRD 325	TetraCon® 700 IQ (SW**)
Sensor Type	4-electrode cell	2-electrode cell	4-electrode cell	4-electrode cell
Measuring Range	10 µS/cm ... 1000 mS/cm * SAL: 0 ... 70	0.001 ... 200 µS/cm	1 µS/cm ... 2 S/cm	10 µS/cm - 500 mS/cm SAL: 0 ... 70 TDS: 0 ... 2000 mg/l
Cell Constants	K = 0.917 cm ⁻¹ , ±1.5% (in free solution) K = 0.933 cm ⁻¹ , with EBST 700- DU/N flow-thru adapter	0.1 cm ⁻¹ , ±2%	0.475 cm ⁻¹ , ±1.5%	K = 0.917 cm ⁻¹ , ±1.5% (in free solution) K = 0.933 cm ⁻¹ , with EBST 700- DU/N flow-thru adapter
Signal Output	Analog	Analog	Analog	Digital
Power Consumption	—	—	—	0.2 Watt
Temperature Sensor	Integrated NTC	Integrated NTC	Integrated NTC	Integrated NTC
Temp. Measuring	32...122 °F (0...+50 °C), ±0.2 K	32...266 °F (0...+130 °C), ±0.2 K	32...212 °F (0...+100 °C), ±0.2 K	23...140 °F (-5...+60 °C)
Maximum Pressure	10 bar (at 68 °F/20 °C)	14 bar (at 68 °F/20 °C)	10 bar (at 68 °F/20 °C)	10 bar
Electrical Connections	Integrated PU connection cable with fitted 7-pole screw connector (IP 65)			2-wire shielded cable with quick fastener to sensor
Certifications	CE, CUL, UL			CE, cETL, ETL
Mechanical	Sensor head: PVC Body: 316 Ti stainless steel Protection rating: IP 68	Cell body: 316 Ti stainless steel Threaded 1/2 inch NPT Isolator material: PEEK Protection rating/Electrode: IP 68	Measuring cell: Epoxy / Graphit Thread: 316 Ti stainless steel Protection rating/Electrode head: IP 68	Sensor head: PVC Body: 316 Ti stainless steel Protection rating IP 68
Dimensions (length x diameter)	7.72 x 1.57 in. (196 x 40 mm) SW: 8.78 x 2.34 in. (223 x 59,5 mm)	5.24 x 0.98 in. (133 x 25 mm)	5.24 x 0.98 in. (133 x 25 mm)	14.06 x 1.57 in. (357 x 40 mm, incl. connection thread of SACIQ sensor connection cable) SW: 14.06 x 2.34 in. (357 x 59,5 mm)
Weight (without cable)	Ca. 660 g; SW: ca. 860 g	Approx. 0.77 lb (350 g)	Approx. 0.66 lb (300 g)	Approx. 1.46 lb (660 g) SW: approx. 2.58 lb (1.170 g)
Guaranty	2 years for defects of quality	2 years for defects of quality	2 years for defects of quality	2 years for defects of quality

Technical Data Conductivity Cells for Special Purposes

Model	TetraCon® 325	TetraCon® DU/T	LR 325/01	LR 325/001
Sensor Type	4-electrode cell	4-electrode cell	2-electrode cell	2-electrode cell
Electrode	Carbon	Carbon	316 Ti stainless steel	316 Ti stainless steel
Measuring Range	1 µS/cm ... 2 S/cm	1 µS/cm ... 2 S/cm	0.001 µS/cm ... 200 µS/cm	0.0001 µS/cm ... 30 µS/cm
Cell Constant	K = 0.475 cm ⁻¹	K = 0.778 cm ⁻¹	K = 0.1 cm ⁻¹	K = 0.01 cm ⁻¹
Temperature Sensor	Integrated	Integrated	Integrated	Integrated
Flow-thru Measurement	Yes, with additional flow chamber D 201	yes	Yes, with additional flow chamber D01/T	Yes, with integrated flow chamber
Length / Diameter	4.72 in. (120 mm)/ 0.62 in. (15.7 mm)	6.10 in. (155 mm)/ 0.39 in. (10 mm)	4.72 in. (120 mm)/ 0.47 in. (12 mm)	4.72 in. (120 mm)/ 0.79 in. (20 mm)
Guaranty	2 years for defects of quality	2 years for defects of quality	2 years for defects of quality	2 years for defects of quality

Ordering Information

Conductivity Cells	Order No.
TetraCon® 700-7	Submersible conductivity sensor for water/wastewater, cable length 23 ft. (7.0 m) 302 316
LRD 01-7	Submersible conductivity sensor for boiler feed water/ion exchanger, cable length 23 ft. (7.0 m) 302 222
LRD 325-7	Submersible conductivity sensor for water/wastewater, cable length 23 ft. (7.0 m) 302 229
TetraCon® 700 IQ	Submersible conductivity sensor for water/wastewater 302 500
SACIQ-7,0	Sensor connection cable for all IQ sensors, cable length 23 ft. (7.0 m) 480 042

Analog:



Further cable length and special seawater/brackwater designs and accessories see brochure "Product Details"

Digital:



* useable with monitor 170/296: up to 200 mS/cm
** SW: Sensor in sea water design (with plastic armouring (POM))

Configuration Guide

		1. Measuring range 2. Cell constant 3. Probe type 4. Temperature compensation 5. Temperature range 6. Pressure range 7. Protection rating	EcoLine LF 170 Field Monitor	QuadroLine® LF 296 Panel Mount Monitor	IQ SENSOR NET Systems 182/2020 XT
Analog	TetraCon® 700	1.: 10 µS/cm..1000 mS/cm 2.: K=0.917 cm ⁻¹ 3.: 4-electrode cell 4.: NTC 5.: 32...122 °F (0...50 °C) 6.: 10 bar 7.: IP 68 (electrode)	Water / Wastewater Usable Measuring Range: 0,0..199,0 µS/cm 0,000..1,999 mS/cm 0,00..19,99 mS/cm 0,0..199,9 mS/cm 32...122 °F (0...50 °C)	—	—
	LRD 01	1.: 0,01..200 µS/cm 2.: K=0.1 cm ⁻¹ 3.: 2-electrode cell 4.: NTC 5.: 32...266 °F (0...130 °C) 6.: 14 bar (68 °F/20 °C) 7.: IP 68 (electrode)	Boiler Feed Water/Ion Exchanger; In-Line Measurements/ Pipework Mounting 1/2" NPT Thread Usable Measuring Range: 0,00..19,99 µS/cm 0,0..199,9 µS/cm 32...266 °F (0..130 °C); 14 bar (68 °F/20 °C)	KI/LF-MIQ/S 505 543	
	LRD 325	1.: 1 µS/cm..2 S/cm 2.: K=0.475 cm ⁻¹ 3.: 4-electrode cell 4.: NTC 5.: 32...212 °F (0..100 °C) 6.: 10 bar 7.: IP 68 (electrode)	Large Usable Measuring Range; In-Line Measurements/ Pipework Mounting 1/2" (3/4" Adapter) NPT Thread 0,0..199,0 µS/cm 0..1999 µS/cm 0,00..19,99 mS/cm 0,0..199,9 mS/cm (MR: 0,0..199,9 mS/cm to 110,0 mS/cm at 122 °F/50 °C) 32...212 °F (0..100 °C); 10 bar at 68 °F (20 °C)	KI/LF-MIQ/S 505 543	
	LR 325/01	1.: 0.001...300 µS/cm 2.: K=0.1 cm ⁻¹ 3.: 2-electrode cell 4.: NTC 5.: 32...212 °F (0...100 °C) 6.: 2 bar 7.: IP 68 (electrode)	Boiler Feed Water/Ion Exchanger; Conductivity Cell with Flow-thru Chamber; Usable Measuring Range: 0,00..19,99 µS/cm 0,0..199,9 µS/cm 0,000..0,200 mS/cm 32...122 °F (0..50 °C)	KI/LF-MIQ/S 505 543 + ADA/AMPH-LAB-LF 303 212	
	LR 325/001	1.: 0.0001..30 µS/cm 2.: K=0.01 cm ⁻¹ 3.: 2-electrode cell 4.: NTC 5.: 32...212 °F (0...100 °C) 6.: 2 bar 7.: IP 68 (electrode)	Boiler Feed Water/Ion Exchanger; Conductivity Cell with Flow-thru Chamber, Trace Measurements Usable Measuring Range: 0.000..1.999 µS/cm 0.00..19.99 µS/cm 32...122 °F (0..50 °C)	KI/LF-MIQ/S 505 543 + ADA/AMPH-LAB-LF 303 212	
	TetraCon® 325	1.: 1 µS/cm..2 S/cm 2.: K=0.475 cm ⁻¹ 3.: 4-electrode cell 4.: NTC 5.: 32...212 °F (0...100 °C) 6.: 2 bar 7.: IP 68 (electrode)	General Application/Water; Large Measuring Range 0.00..19.99 µS/cm 0.0..199.9 µS/cm 0.000..1.999 mS/cm 0.00..19.99 mS/cm 0.0..199.9 mS/cm (32...77 °F/0..25 °C) 32...122 °F (0..50 °C) (MR: 0.0..199.9 mS/cm up to 110.0 mS/cm at 122 °F/50 °C)	KI/LF-MIQ/S 505 543 + ADA/AMPH-LAB-LF 303 212	
	TetraCon® DU/T	1.: 1 µS/cm..2 S/cm 2.: K=0.778 cm ⁻¹ 3.: 4-electrode cell 4.: NTC 5.: 32...140 °F (0...60 °C) 6.: 2 bar 7.: IP 65	Flow-thru cell Usable Measuring Range: 0.00..19.99 µS/cm 0.0..199.9 µS/cm 0.000..1.999 mS/cm 0.00..19.99 mS/cm 0.0..199.9 mS/cm 32...122 °F (0..50 °C)	KI/LF-MIQ/S 505 543 + ADA/AMPH-LAB-LF 303 212 + KKDU 325 301 963	
	Digital	TetraCon® 700 IQ	1.: 10 µS/cm..500 mS/cm 2.: K=0.917 cm ⁻¹ 3.: 4-electrode cell 4.: NTC 5.: 32...140 °F (0...60 °C) 6.: 10 bar 7.: IP 68 (electrode)	—	—

— Not Applicable

Parameter section

Dissolved Oxygen

pH/ORP

Conductivity

 Turbidity/
Suspended Solids

Nitrogen

Phosphate

 Carbon: COD/TOC/
DOC/BOD/SAC